
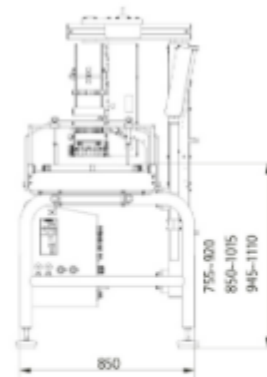
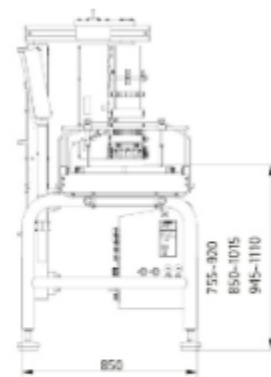


# Caractéristiques

## Dimensions

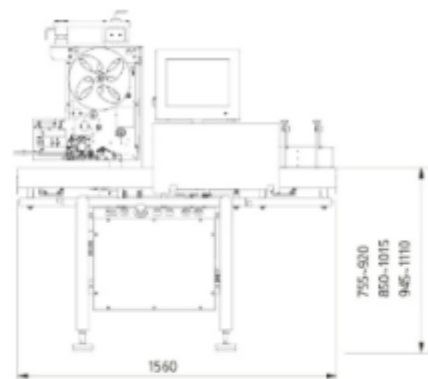

## Weighing

Capacity	Max 6 kg (or greater)	Max 12kg (or greater)
Single Interval	e= 1g	e= 2g
Pack Speed	up to 80 packs per minute	
Pack Size	L80-300mm x W40-400mm x H180mm	

Throughput dependant on product weight and size.

## Display

Screen	15" Colour LCD touchscreen
Touch panel	XGA a-Si TFT LCD Resistive touch

## Operation

Weighing Modes	Catch Weight, Fixed Weight/Price, Average (Emark)
Labelers	Multiple labelers/printers
Communication	Ethernet, USB, RS232
Operating System	Windows 10 OS
Language	Multi-lingual Unicode
Software	WorldView (embedded application)
Database	SQL
Connectivity	Remote programming and control
	Connectivity to meet industry standards
	Customisable output data
	Interconnectivity to back-office data management

## General

Power Supply	220-240V(115V Option) 50/60Hz AC Single Phase
Operating Temperature	0 to +30°C

## Standard Features

Scale Length	400mm
Scale Cover	'lift-off' formed polycarbonate
Sensors	Overhead retro reflective
Labellers	Signature
Pack Guides	S100 tall guides
Conveyors	Split blue belts