



Caractéristiques

Dimensions

Standard Configuration

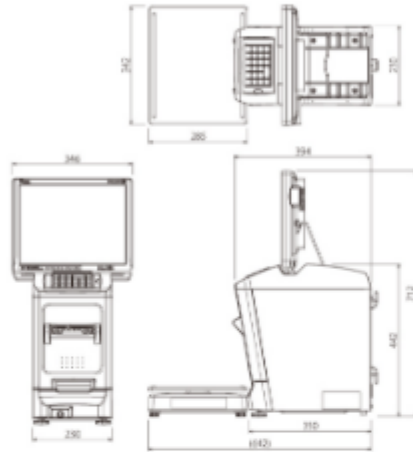

Modular Configuration

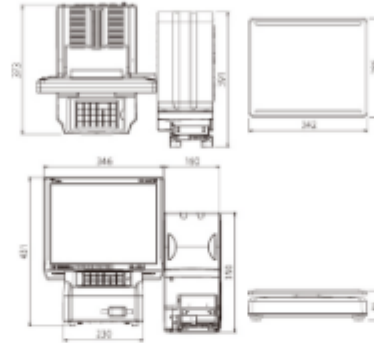

Capacity

Interval type	Multi interval				Single interval
	Capacity	Max 3/6 kg	Max 6/15 kg	Max 15/30 kg	Max 30/60 lb
Scale interval	e=1/2 g	e=2/5 g	e=5/10 g	e=0.01/0.02 lb	e=0.01 lb
Weighing range	20 g-6 kg	40 g-15 kg	100 g-30 kg	e=0.01-0.02 lb	0.20-30 lb

Thermal printer

Label type	Die-cut label	Linerless label
Label width	25 - 80 mm/0.98-3.1 inches	44-59 mm/1.73-2.3 inches
Label length	20-150 mm/0.79-5.9 inches	20-500 mm/0.79-19.7 inches * Maximum printing length is 300 mm/11.8 inches

Operation console

Display panel	TFT LCD color (15 inches) touch panel
Operation keys	Mechanical keys and touch screen
Memory for programmable files	18 GB

General

Power source and power consumption	AC120 V; 60 Hz; 1.5 A,125 W AC220-240 V; 50/60 Hz; 1.0 A,125 W
Net weight	Main unit (Standed configuration) Single labeler type:16.5 kg/36.4 lb
	Main unit (Modular configuration) Single labeler type:19.7 kg/43.4 lb Twin labeler type:25.7 kg/56.7 lb
	Scale platform 3.8 kg/8.4 lb