
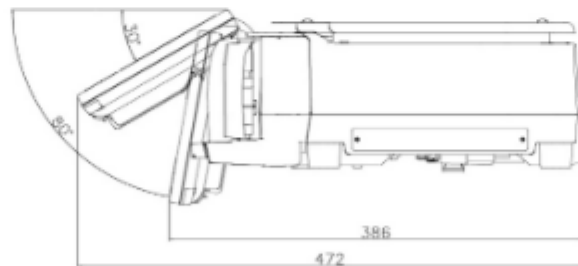


Caractéristiques

Dimensions

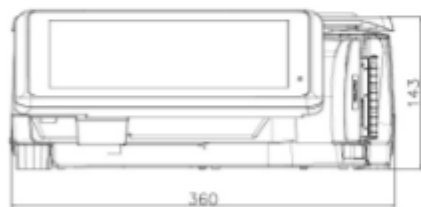

Specification

Capacity		Max 6kg	Max 15kg/ 30lb	Max 30kg		
Single Interval	1/ 3,000	e= 2g	e= 5g/ 0.01lb	e= 10g		
	1/ 6,000 or 1/ 7,500	e= 1g	e= 2g	e= 5g		
Capacity		Max 3/ 6kg	Max 6kg/ 15kg	Max 15kg/ 30kg		
Multi Interval	1/ 3,000	e= 1/ 2g	e= 2/ 5g	e= 5/ 10g		
SM-5300 X Model	Bench	Pole	Elevated	Hanging	Self-Service 12.1"	Self-Service 19"
Dimension W x D x H (mm)	360 x 472 x 143	360 x 500 x 542	360 x 510 x 574	400 x 339 x 816	360 x 481 x 637	442 x 480 x 761
Operator Display	10.1" WSVGA with Capacity Touch (1024 x 600)	○	○	○	○	—
	12.1" TFT SVGA with Touch (800 x 600)	—	—	—	—	○
	19" TFT SVGA with Touch (1280x1024)	—	—	—	—	○

Display Resolution		1/3000, 1/6000, 1/7500				
Label / Receipt	Types	Liner			Linerless with Auto-cutter	
	Roll Diameter	Max 125mm			Max 95mm	
	Roll Width	Max 73mm			Max 62mm	
	Print Width	60mm			61mm	
	Printing Speed	Up to 150mm / second*				
	Print Resolution	300 dpi				
Power Source		AC 100 / 110 or 220 / 230 / 240 Volts (50/ 60 Hz) Auto Switch				
Operating Temperature		-10°C to +40°C				
Humidity		15% to 85% RH				
Standard Interface		Ethernet 10 /100 Base T, 4 x USB 2.0, 1 x RJ11				
Net Weight		10.7 kg	11.7 kg	13.2 kg	14.0 kg	13.3 kg 17.0 kg